
Common Mode Filters For Automotive Signal Line
Size 4532

- /ƨϒLJI·ŎŰ LJNƨŘdzŎŰăΣ ǿKƨăŜ ŎKI·NI·ŎŰŜNλăəŎă I·NŜ ŜIjdzλØI·fŜyŰ űƨ űKI·ú 2Ŧ Ŏ2yØŜyə2yI·t LJNƨŘdzŎŰăφ
- ! / a ! прон9¢ I ŦƨN I·dzúƨϒƨəØŜ 9ŰKŜNyŜŰΣ ǿKλŎK dzăŜă ƨdzN dzyλIjdzŜ ŰŜŎKyƨfƨƎëΣ λă I· LJNƨŘdzŎŰ úKI·ú ŎI·yϒNŜI·fΛÎŜ KλƎKŜNπfŜØŜf {ŎŘнм ϒƨŘŜ Ŏ2yØŜNăλ2yϒŎKI·NI·ŎŰŜNλăəŎă ǿKλfŜ ϒI·λyűI·λyλyƎ I· KλƎK [πØI·fdzŜ 2Ŧ нллтк I φ
- !9/πvнлл IjdzI·fΛŮŜŘ
- hLJŜNI·əyƎ ŰŜϒLJŜNI·údzNŜ ϒ çпл ű2 ьмнрс/
- vœI·yəűëϒ рллLJŎă
-


Dimensions: [mm]


Land Pattern: [mm]



Electrical Properties:

Typical Electrical Characteristics:

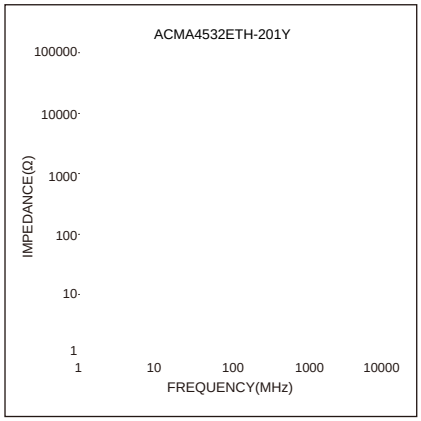



Soldering Reflow:

Preheat condition: 150 ~200℃/ 60~180 sec.

Allowed time above 217℃: 60~150 sec.

Max temperature: 260℃.


Allowed Reflow time: 3x max.

Packaging Information:

Tape Dimension:

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
ACMA4532ETH	3.60 ± 0.1	4.90 ± 0.1	1.5 ± 0.1	4.0 ± 0.1	8.0 ± 0.1	12.0 ± 0.3	3.0 ± 0.1	1.75 ± 0.1	0.26 ± 0.05

Peel force of top cover tape:

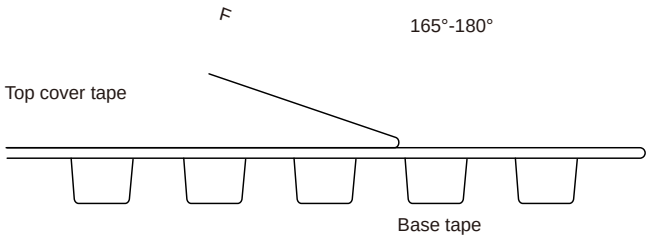

Reel Dimension：[mm]



Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

-
-
-
-