
-
- Ultra low buzz noise, due to composite construc on.
- The wide pad design provides excellent an -vibra on capability.
- AEC-Q200 qualified.
- Opera ng temperature: -55 to +155 ℃ (including self-temperature rise)
- Quan ty: 1000PCS


-
- Headlamps, tail lamps and interior ligh ng
-

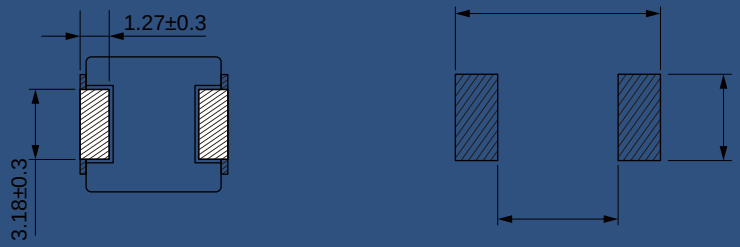

	(μH)		(A)	(A)	Satura on (A)	Satura on (A)	(mΩ)

Satura on Current will cause L to drop approximately 20%.
Temperature Rise Current: The actual value of DC current when the temperature rise is △T=40°C

Typical Electrical Characteristics:

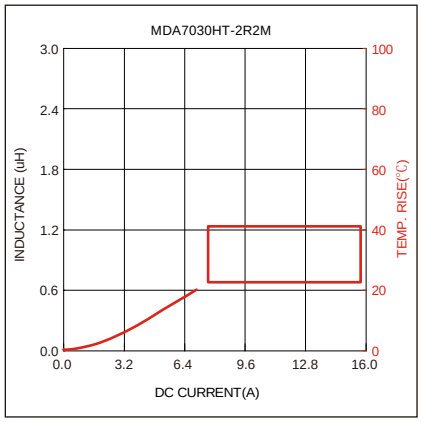


Soldering Reflow:


Packaging Information:

Tape Dimension：

Peel force of top cover tape:

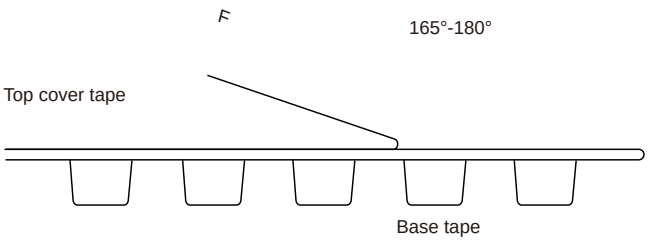

Reel Dimension：[mm]

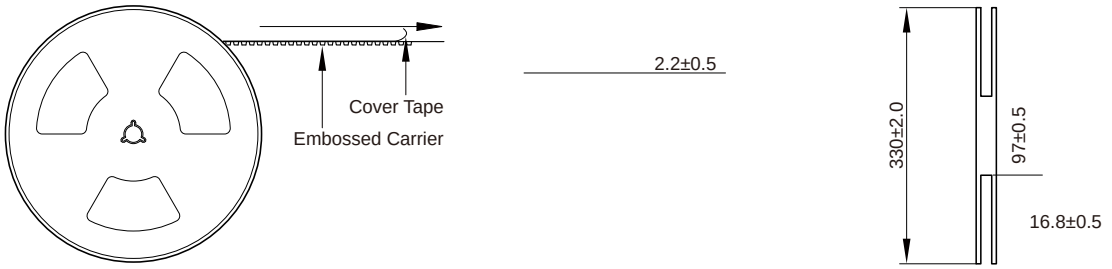

Packaging Quantity:



1000 Pcs/Reel

2 Reel /Inner box(2000 Pcs)

3 Inner box/Carton box(6K Pcs)

Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the