
Chip Ferrite Bead SMD Type
Size 1206




- Noise reduc on solu on for general signal line.
- Various frequency characteris cs with 2 materials of di erent features for countermeasures against every-thing from general signals to high-speed signals
- AEC-Q200 qualified
- Opera ng temperature:-55°to +150°C
- Quan ty: 3000pcs

- Signal line filter for body controls,and car mul media etc.

Dimensions: [mm]

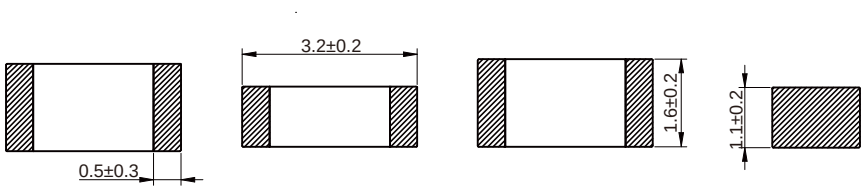

Land Pattern: [mm]



Electrical Properties:

Part No	Z @ 100 MHz	Tolerance	R_{DC}	I_R
FBA1206-260-501R		±25%	0.20	500
FBA1206-310-501R		±25%	0.20	500
FBA1206-420-501R		±25%	0.20	500
FBA1206-500-501R		±25%	0.20	500
FBA1206-700-501R		±25%	0.20	500
FBA1206-900-501R		±25%	0.20	500
FBA1206-121-901R		±25%	0.15	900
FBA1206-151-901R		±25%	0.15	900
FBA1206-221-701R		±25%	0.35	700
FBA1206-301-701R		±25%	0.35	700
FBA1206-471	ŵ Ò À	±25%	26 0.35	400
31		±25%	0.40	400

42

I_R refering to 20K self-hea ng above ambient temperature

50

70

90

Typical Electrical Characteristics:

