THC Series
SMD High Current Inductor
Size 2012


CHARACTERISTICS

-
-
-


APPLICATION

-
-

Dimensions: [mm]

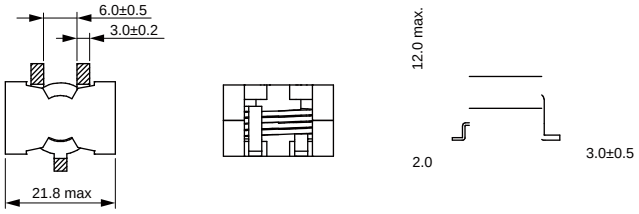



Land Pattern: [mm]





Electrical Properties:


Typical Electrical Characteristics:

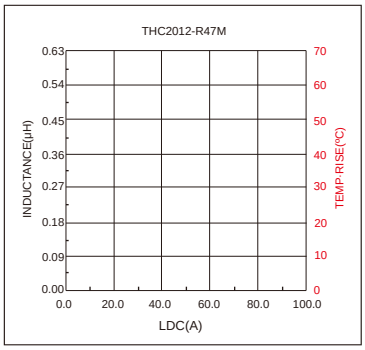


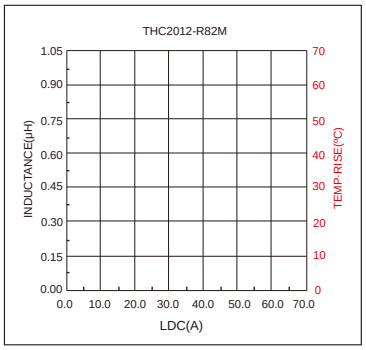


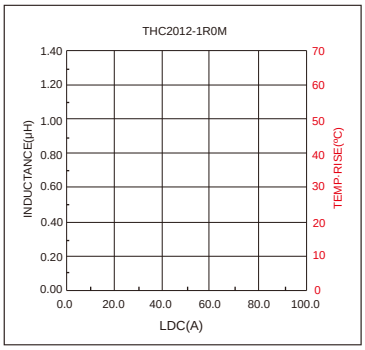


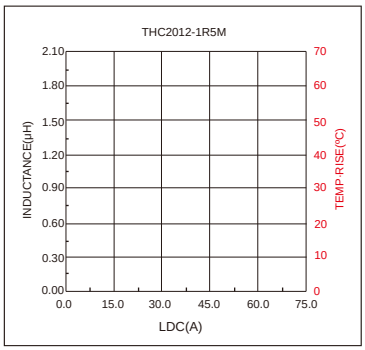


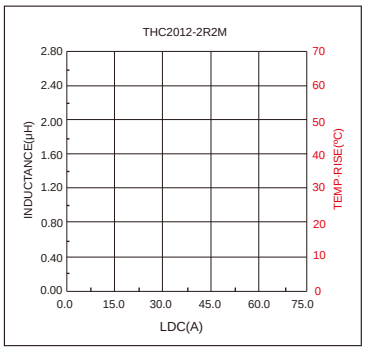


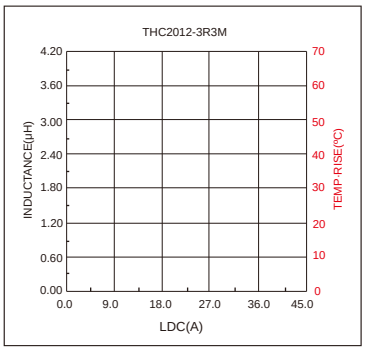

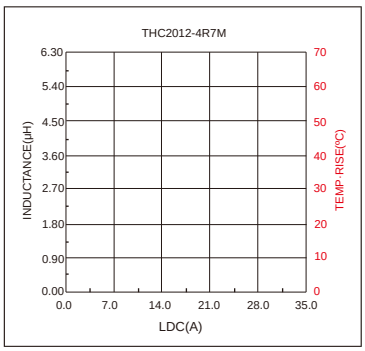

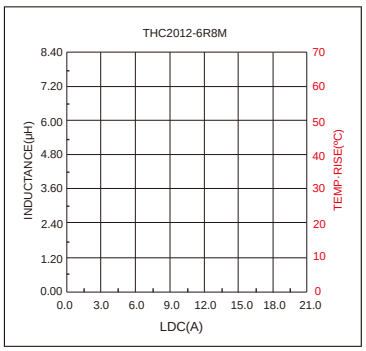

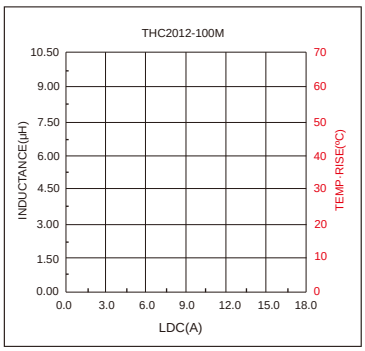

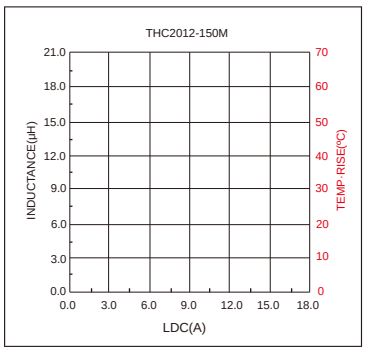


Soldering Reflow:


Packaging Information:

Tape Dimension:


Peel force of top cover tape:

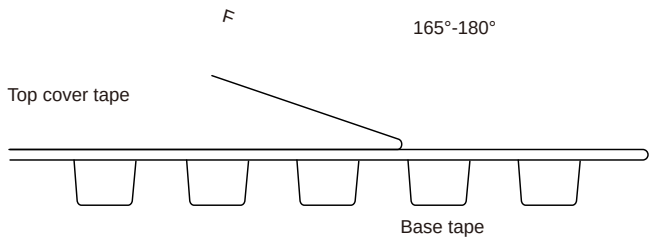

Reel Dimension：[mm]

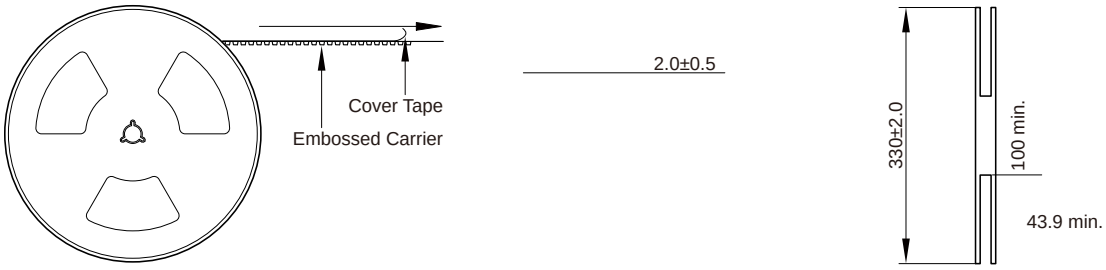

Packaging Quantity:

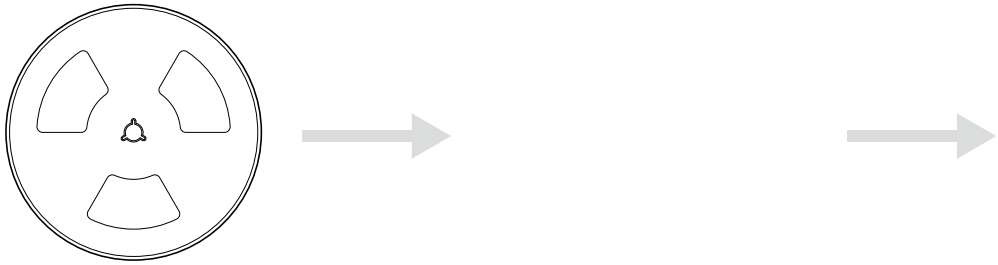

120 Pcs/Reel

1 Reel /Inner box(120 Pcs)

3 Inner box/Carton box(360 Pcs)

Cautions and Warnings:

Storage Conditions：

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

-
-
-
-